


### 1 Curtain Details

Slat 1.57 in. [40mm]  
Extruded Aluminum Slat

#### Color Options



● Clear Anodized

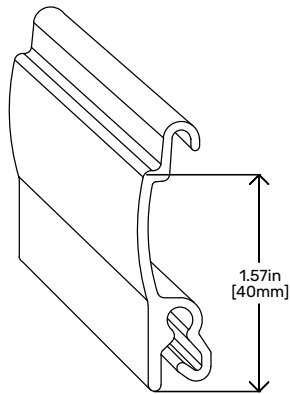

### 2 Bottom Bar

Bottom Bar




HD Bottom Bar (Optional)

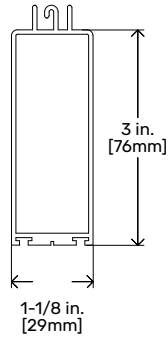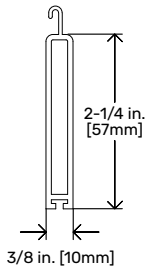

### 3 Guide Options

Guide Rail

HD Guide Rail (Optional)

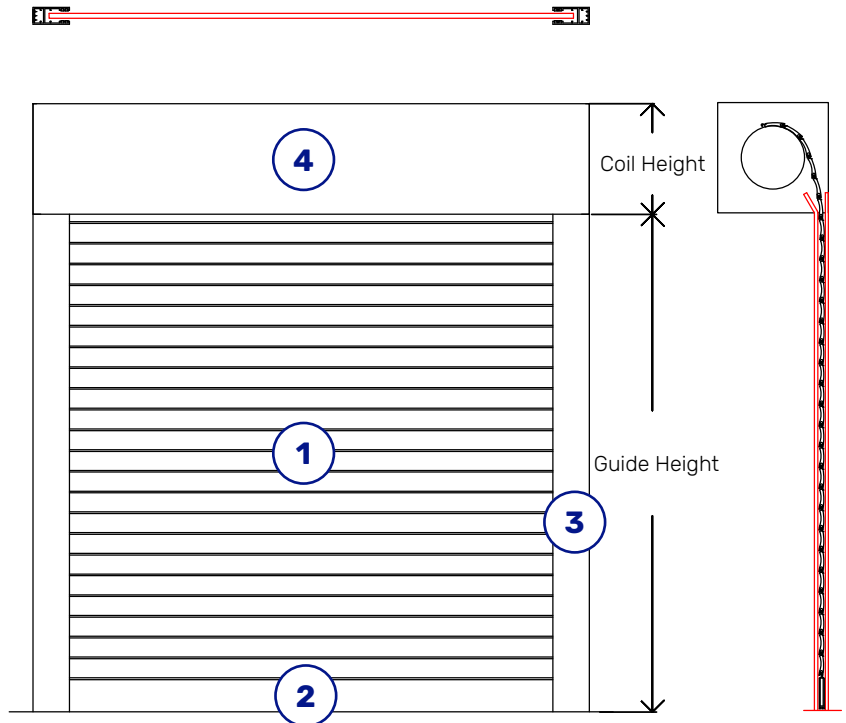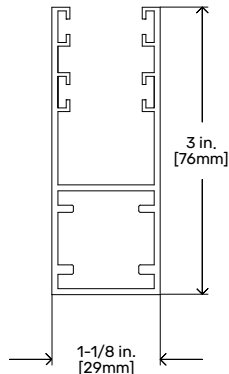


### 4 Coil Box Size

Coil Height	Guide Height
6 in. [152mm]	50 in. [1270mm]
7 in. [178mm]	78 in. [1981mm]
8 in. [203mm]	112 in. [2845mm]


# Features And Options

## Mounting Type

### Between Jamb

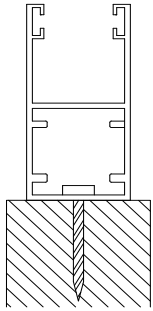

### Face Of Wall



## Locking Bottom Bar Options

- Locking Coil side or Opposite Coil with Slide Lock or Cylinder.
- Heavy Duty Bottom Bar with Standard Mortise, SFIC, LFIC or Thumbturn



LFIC



SFIC



StdMortise



Thumbturn



Standard Mortise Cylinder Key Switch

## Operation

### Manual Push/Pull

- Counterbalance with Spring Assist for easy manual operation
- Available with locking bottom Bar (Slide lock or Cylinder Locks)

### Crank Operation


- Crank Operation Coil Side or Thru-Wall
- Available with locking bottom Bar (Slide lock or Cylinder Locks)





### Electric Operation

- 120V In Tube Electric Motor Operation
- Push Button or Key Cylinder Switch for easy up/down

## Motor Options

- Key Switch – Open/Close using Standard Mortise, SFIC
- RTS – Wireless Open/Close using Telis remote
- Crank Motor Override (CMO) – Open/Close during Power Outage
- 4-In-1 Group Control – Connect 4 motors to open/close simultaneously, daisy chain Group Controls to open/close more than 4 operators

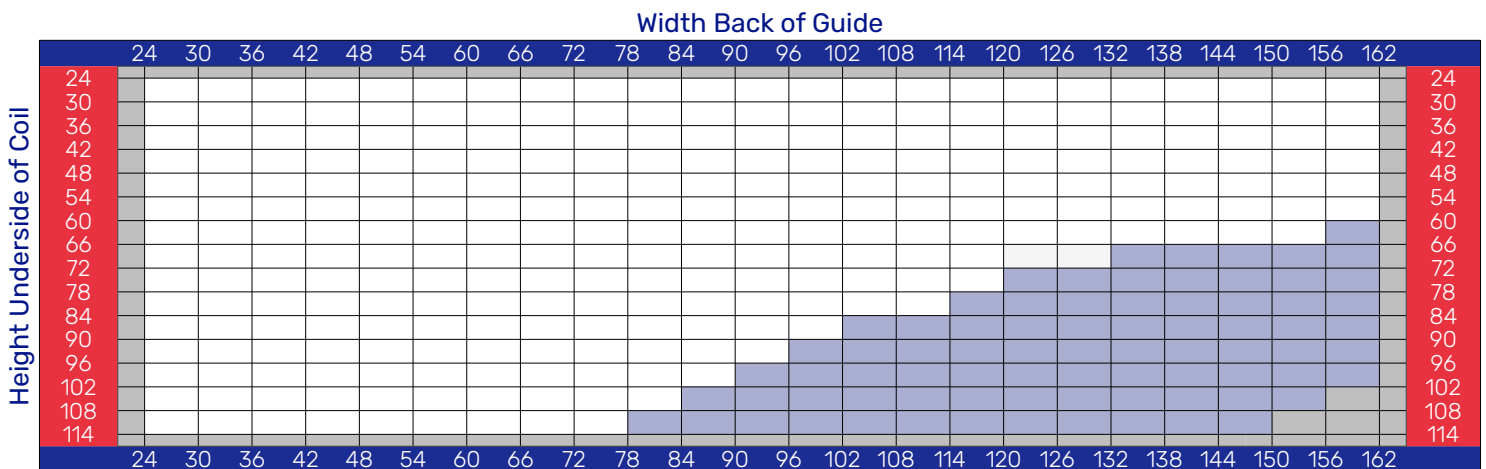

- 
Manual Push/Pull, Crank, Electric Operator
- 
Crank or Electric Operator
- 
Electric Operator
- 
Not Available