






1 Curtain Details

Slat 1.57 in. [40mm] Roll Formed, Foam Filled Aluminum Slat


Color Options

-  Metallic Paint
-  Dark Bronze Paint
-  Beige Paint
-  White Paint

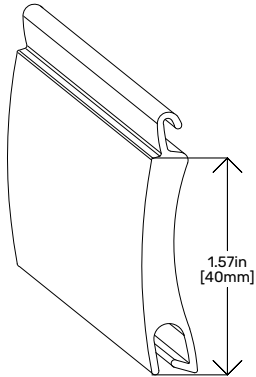


2 Bottom Bar

Bottom Bar




HD Bottom Bar (Optional)





3 Guide Options

Guide Rail



HD Guide Rail (Optional)

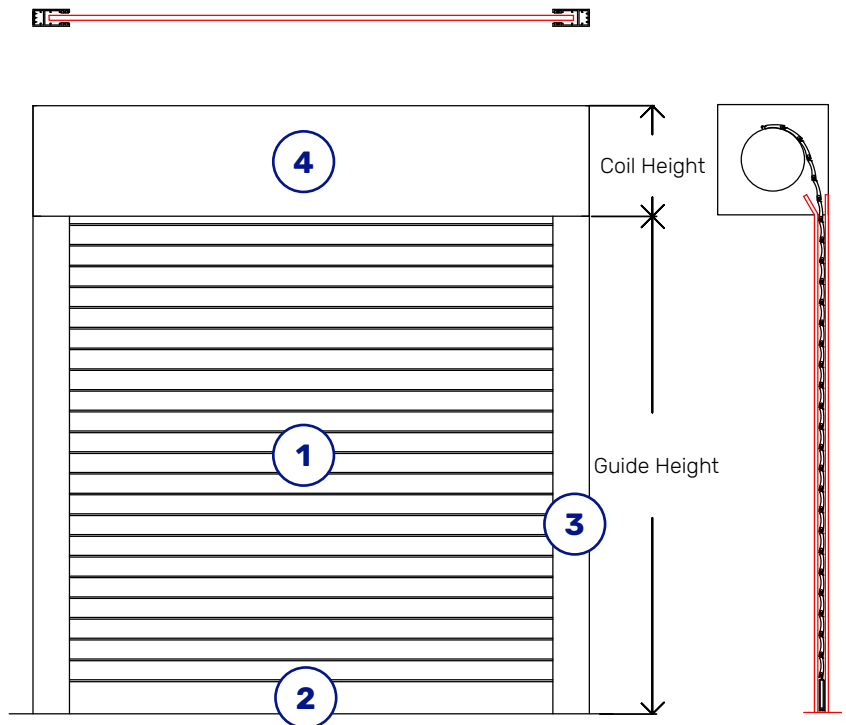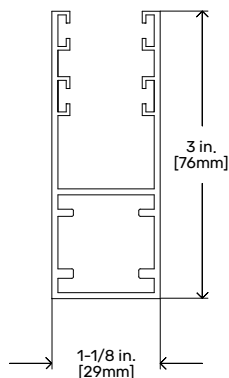


4 Coil Box Size

Coil Height	Guide Height
6 in. [152mm]	38 in. [965mm]
7 in. [178mm]	69 in. [1753mm]
8 in. [229mm]	105 in. [2667mm]
9 in. [229mm]	141 in. [3581mm]


Features And Options

Mounting Type

Between Jamb



Face Of Wall



Locking Bottom Bar Options

- Locking Coil side or Opposite Coil with Slide Lock or Cylinder.
- Heavy Duty Bottom Bar with Standard Mortise ,SFIC, LFIC or Thumbturn



LFIC



SFIC



StdMortise



Thumbturn



Standard Mortise Cylinder Key Switch

Operation

Manual Push/Pull

- Counterbalance with Spring Assist for easy manual operation
- Available with locking bottom Bar (Slide lock or Cylinder Locks)

Crank Operation


- Crank Operation Coil Side or Thru-Wall
- Available with locking bottom Bar (Slide lock or Cylinder Locks)

Electric Operation

- 120V In Tube Electric Motor Operation
- Push Button or Key Cylinder Switch for easy up/down

Motor Options

- Key Switch – Open/Close using Standard Mortise, SFIC
- RTS – Wireless Open/Close using Telis remote
- Crank Motor Override (CMO) – Open/Close during Power Outage
- 4-In-1 Group Control – Connect 4 motors to open/close simultaneously, daisy chain Group Controls to open/close more than 4 operators

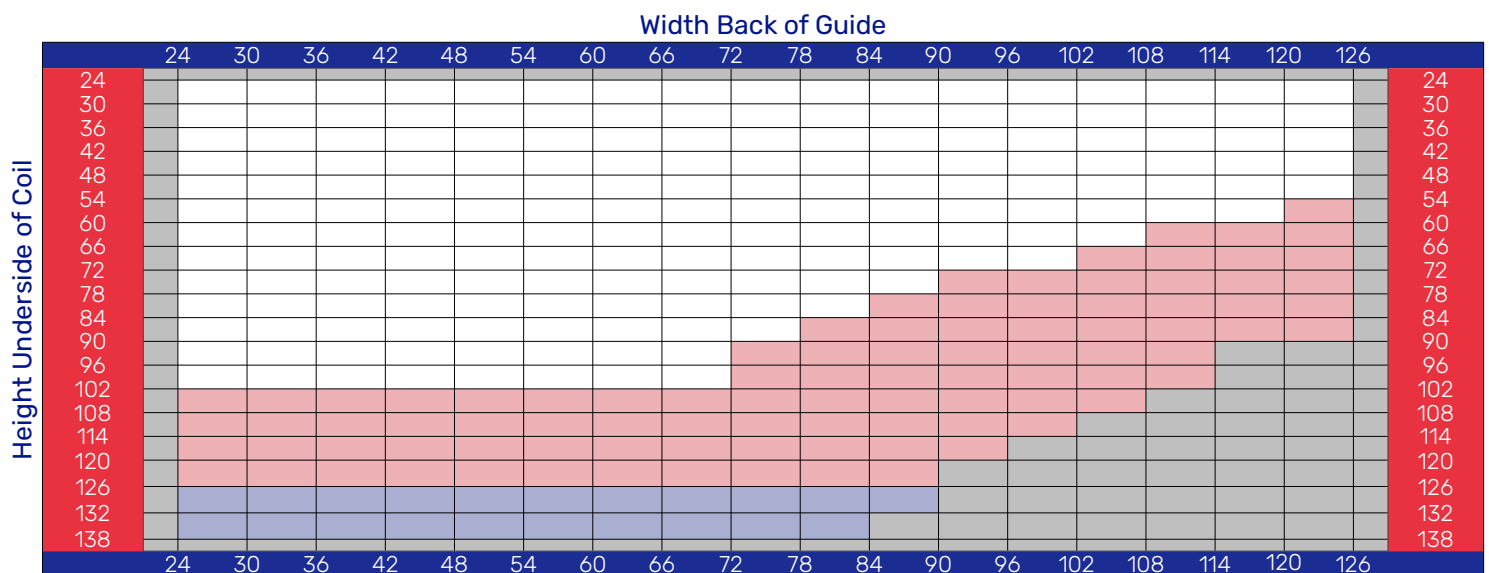

- Manual Push/Pull, Crank, Electric Operator
- Crank or Electric Operator
- Electric Operator
- Not Available